

UNIVERSITY OF BERGEN

POD-based reduced order model using LiDAR measurements from FINO1

Martine Rønning

martine.ronning@student.uib.no

Mostafa Bakhoday Paskyabi, Maria Krutova, Joachim Reuder

UNIVERSITY OF BERGEN




EERA DeepWind'2021, Trondheim, Norway

Motivation



- Wake is crucial to understand when optimizing wind farm layouts and during wind farm controlling.
- Experimental, numerical and analytical methods

Motivation

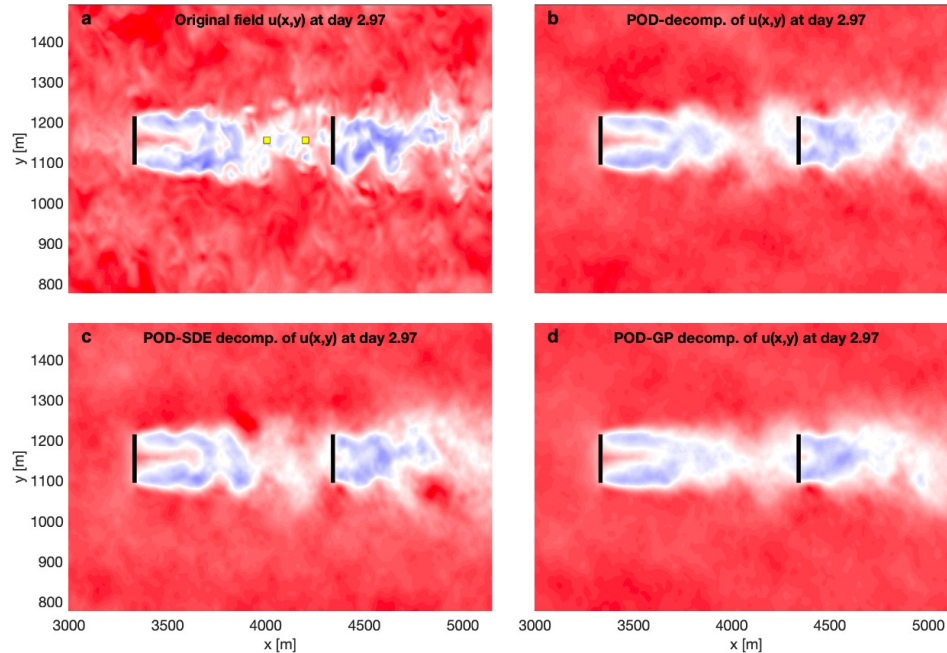


- (a) Original stream-wise velocity u directly from LES
- (b) Reconstructed u by the standard POD scheme
- (c) Reconstructed u from the Stochastic Differential Equations-based model
- (d) Reconstructed u from the Standard Gaussian Process based model.

Source: [M. Bakhoday](#)





Proper Orthogonal Decomposition (POD) and LiDAR measurements

Data – LiDAR measurements

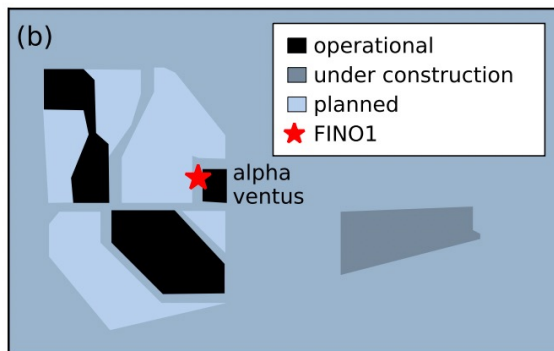


Source: [M. Krutova](#)

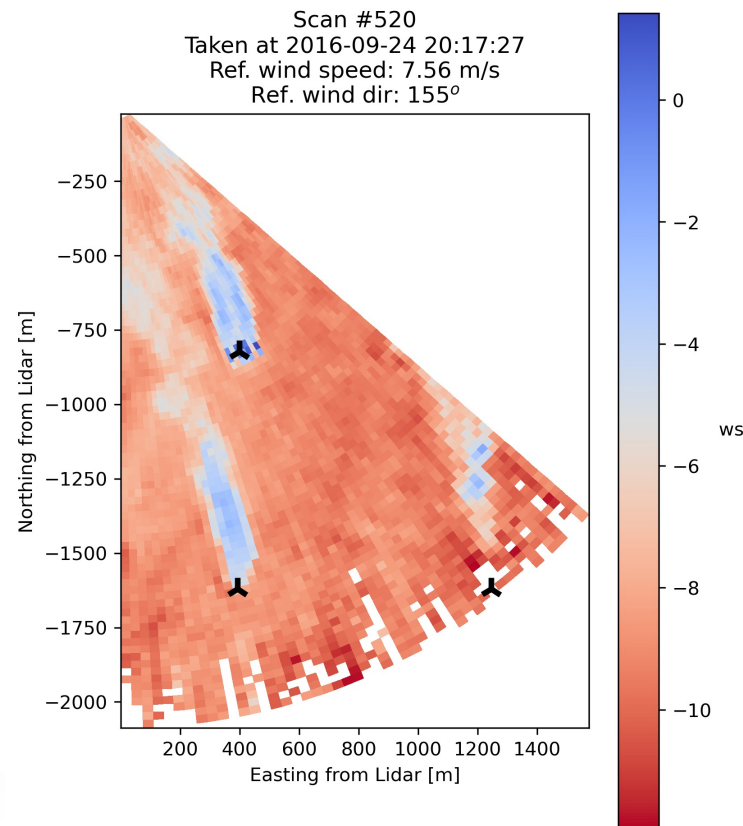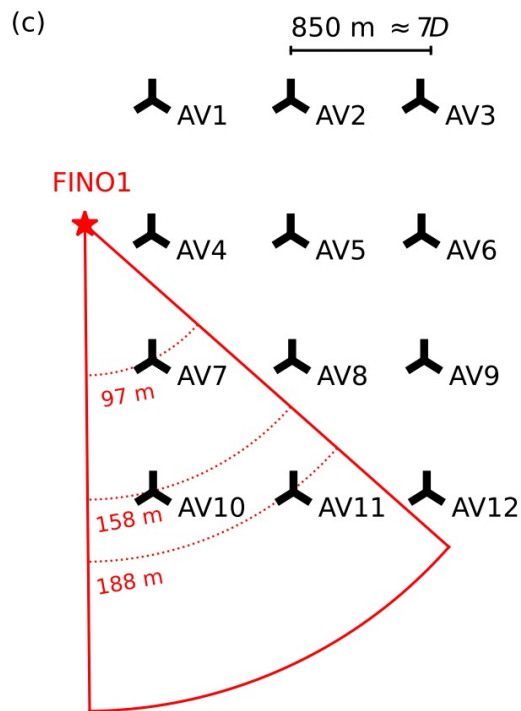



Methodology

- Data
 - Radial velocity
 - Subdomain
 - Quality control
- Reduced Order Model (ROM)
- Proper Orthogonal Decomposition (POD):
 - Qualified data sent into the POD algorithm

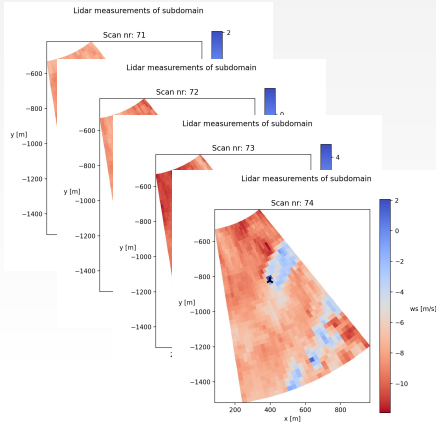

POD

$$u'(x, t) = \sum_{i=1}^N a_i(t) \phi_i(x)$$

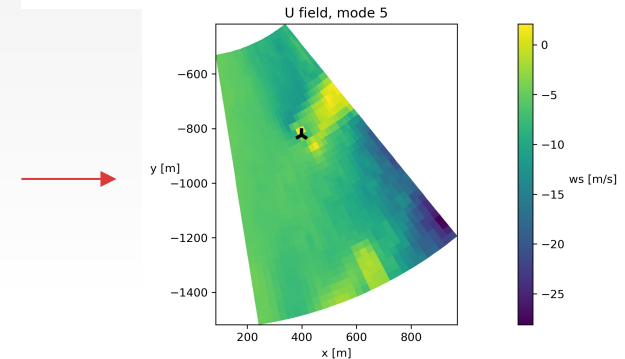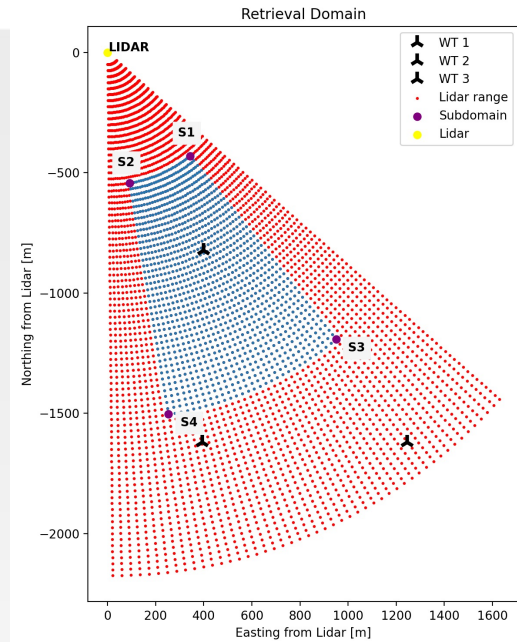

Ongoing and future work

- Retrieval and gap filling
- Weighting coefficient α :
 - Focus: Galerkin approach for non-linearities
 - Stochastic weighting coefficient
- Classify data into stabilities before POD
- Comparison and validation



Thank you



uib.no

This work is partly supported by the CONWIND project, ENERGIX, grant number 304229