




# XAROSA

20 MEGAPIXEL BOTTOM-MOUNT CMOS CAMERA

The next level of EM imaging

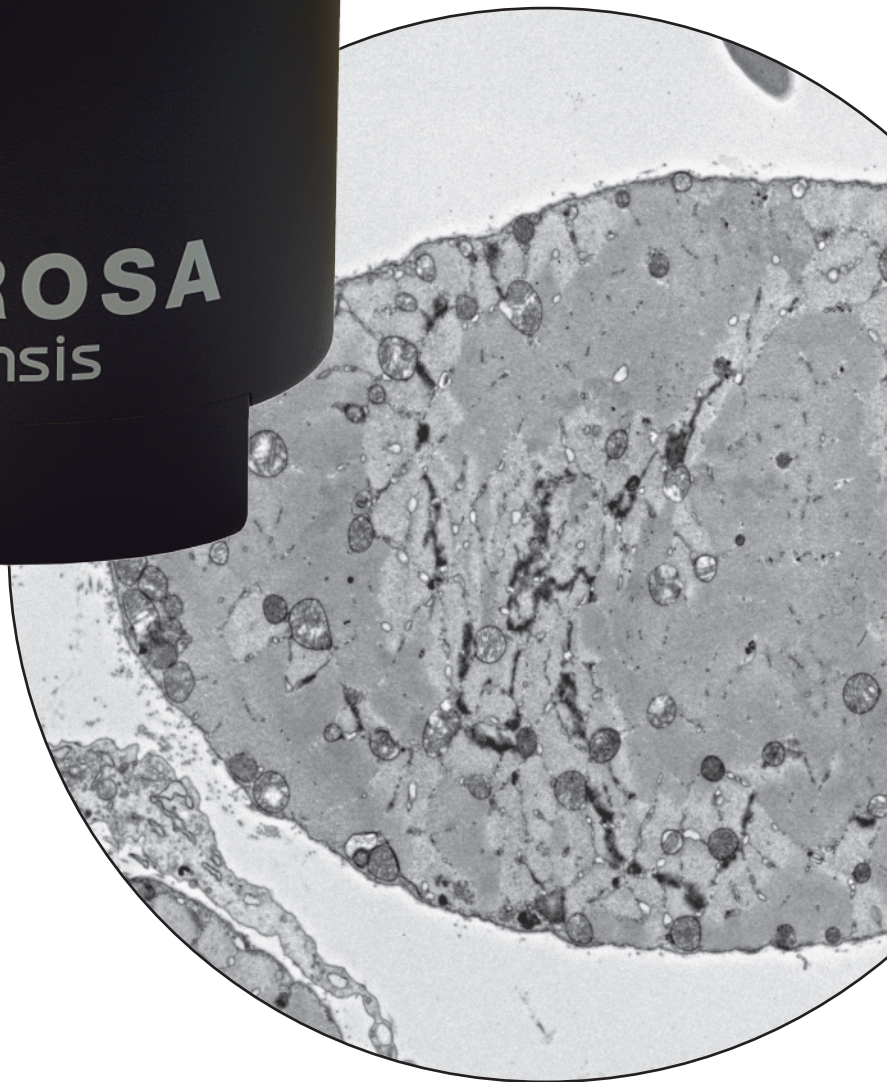

20 MEGAPIXEL  
CMOS IMAGE SENSOR  
30 FPS IN FULL RESOLUTION  
FIBER OPTICS

# XAROSA

20 MEGAPIXEL BOTTOM-MOUNT CMOS TEM CAMERA

**The XAROSA brings you to the next level of EM imaging.**

**With its unrivaled 20 megapixel CMOS image sensor it sets new benchmarks in speed, resolution and price performance ratio.**

Our exciting new TEM CMOS camera XAROSA (Model B20T) provides more than 30 frames per second in its full 20 megapixel resolution in live. Utilizing a modern Thunderbolt™ interface a high quality and high speed data transfer to modern workstations is always guaranteed. In combination with our state of the art imaging software RADIUS the XAROSA provides video recording, high-dynamic range imaging (HDRI), smart averaging and drift correction. And the best thing about it is: the XAROSA brings this all to you out of the box, no additional options needed.

EMSIS understands how to provide the best fit of resolution and sensitivity for all TEM applications, proven manifold already with our well respected current fiber optical coupled cameras, used all over the globe. This concept once again comes to live with the XAROSA, achieving the perfect match between pixel size, fiber optics and scintillator. The use of a high-quality and tailored

tapered fiber for the XAROSA enlarges the field of view and adapts the effective pixel size ideally at the same time.

The latest CMOS technology of the XAROSA brings to you speed, sensitivity and high dynamic range. The CMOS image sensor shows no blooming and hence is best suited also for diffraction images.

The best TEM camera would not be complete without the best TEM acquisition and imaging software: our RADIUS software provides everything you need and more: as a dashboard for your camera-TEM system it combines full camera control with TEM control. Features like drift correction, "click-to-center", smart averaging, full interactive measurements and the integrated image database eases your daily work routines.


## APPLICATIONS

ALL LIFE AND  
MATERIALS SCIENCES

HR-TEM

IN-SITU

DIFFRACTION

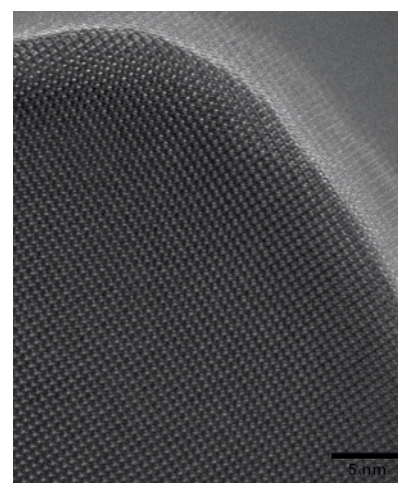

## SPECIFICATIONS

Camera	XAROSA
Model	B20T
Sensor	CMOS
Image size (max)	5,120 x 3,840 pixels
Effective pixel size	13 x 13 $\mu\text{m}^2$
Cooling	Water
Frame rate	30 fps at full resolution 120 fps at max. speed
Camera coupling	Fiber optics
Data interface	Thunderbolt™
Operating system	Windows 7/ Windows 10 (64 bit)
Imaging software	RADIUS 2.0
Mounting position	Bottom mount, on axis
Available options	Flange with integrated shutter for specific TEMs; Beam stop

*(Specifications are subject to change without prior notice by the manufacturer.)*



EMSIS GmbH

Mendelstraße 17

48149 Münster, Germany

Phone: +49 (0)251 297962-0

Fax: +49 (0)251 297962-90

E-mail: [info@emsis.eu](mailto:info@emsis.eu)

[www.emsis.eu](http://www.emsis.eu)